


## DC CONNECTOR KIT FOR FRONIUS SYMO 10.0 - 20.0 KW AND FRONIUS ECO

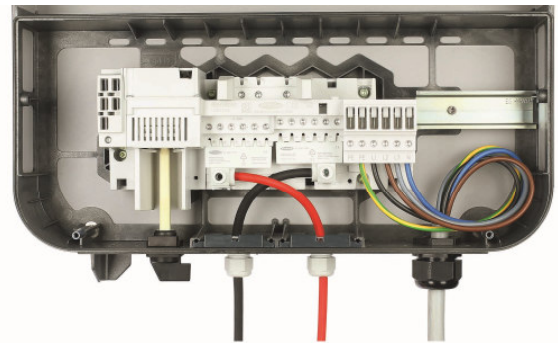

/ The DC connector kit enables the connection of both inputs in the event of MPP currents above 35 A and a cable cross section of more than 16 mm<sup>2</sup>, for example when using a DC Box. A cross section of 6 mm<sup>2</sup> - 25 mm<sup>2</sup> can be connected using the DC connector kit. The terminal is safe to touch and no ferrules are needed. The DC connector kit is particularly suitable for use with the Fronius Symo 10.0 - 20.0 kW and Fronius Eco inverters.

### TECHNICAL DATA

TECHNICAL DATA	DC CONNECTOR KIT 10 – 27 kVA
Item number	4,251,015
Max. current	100 A
Cable cross section	6 mm <sup>2</sup> - 25 mm <sup>2</sup>
Cable type	Used for copper and aluminium cables - strand or wire, sector or circular <sup>1)</sup>
Torque	5.5 Nm / 50 lb-in
Clamping area of the screw joint	8 mm - 13 mm
Standards	IEC 60999:2000, UL508, UL486A, CSA C22.2

<sup>1)</sup> PV cables must be used.