


SolarEdge Home Hub Inverter

Single Phase, for Europe / India / Philippines

SE2200H / SE3000H / SE3680H / SE4000H / SE5000H / SE6000H / SE8000H / SE10000H

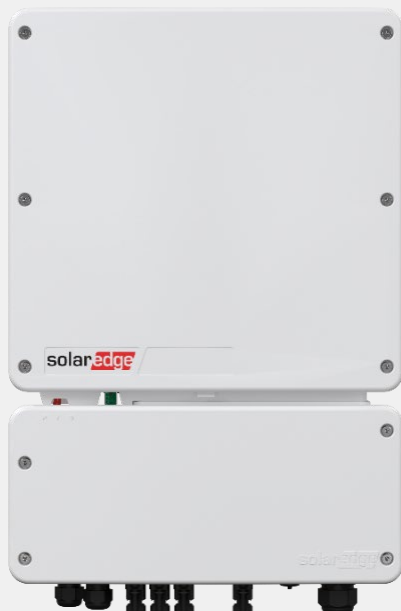

HOME BACKUP

Single phase inverter for storage and backup applications, with one part number for all power classes

- ✓ The ultimate home energy manager in charge of PV production, battery storage, backup operation during a power outage*, and smart energy devices
- ✓ One part number for all power classes, streamlining every step:
 - ✓ Unified product configuration simplifies ordering, logistics, and inventory
 - ✓ Optimized system design, selection, and installation
- ✓ Record-breaking up to 99% weighted efficiency with up to 200% DC oversizing
- ✓ Integrates seamlessly with the complete SolarEdge Home ecosystem, through the SolarEdge Home Network
- ✓ Small, lightweight, and easy to install
- ✓ Advanced safety features with integrated arc fault protection
- ✓ Module-level monitoring and full visibility of battery status, PV production, and self-consumption data
- ✓ A scalable solution that supports future homeowner needs through easy connection to a growing ecosystem of products

* Backup applications are subject to local regulations and require a connection to the SolarEdge Home Batteries and the SolarEdge Home Backup Interface.

/ SolarEdge Home Hub Inverter

Single Phase, for Europe / India / Philippines

SE2200H / SE3000H / SE3680H / SE4000H / SE5000H / SE6000H /
SE8000H / SE10000H

Applicable to inverters with part number	SE10000H-RWSKBF57 ⁽¹⁾								Units
	SE2200H ⁽²⁾	SE3000H	SE3680H	SE4000H	SE5000H	SE6000H	SE8000H	SE10000H	
OUTPUT – AC ON GRID									
Rated AC Power	2200	3000	3680	4000	5000 ⁽³⁾	6000	8000	10,000	VA
Maximum AC Power Output	2200	3000	3680	4000	5000 ⁽³⁾	6000	8000	10,000	VA
AC Output Voltage (Nominal)	220 – 230 / 240								Vac
AC Output Voltage (Range)	184 – 264.5								Vac
AC Frequency Range (Nominal)	50 / 60 ± 5								Hz
Maximum Continuous Output Current RMS	10	14	16	18.5	23	27.5	36.5	45.5	A
Fault Current Protection (100ms)	40						70		A
Total Harmonic Distortion (THD)	< 3								%
Power Factor	1, adjustable -0.9 to 0.9						1, adjustable -0.8 to 0.8		
Utility Monitoring, Islanding Protection, Country Configurable Thresholds	Yes								
Charge Battery from AC (if allowed)	Yes								
Typical Nighttime Power Consumption	< 2.5								W
OUTPUT – AC BACKUP									
@50Hz	Maximum AC Power in Backup Operation	10,000 ⁽⁴⁾							W
	AC Frequency	50 ± 5							Hz
	Maximum Continuous Output Current in Backup Operation	45.5							A
	Fault Current Protection (100ms)	70							A
	AC Output Voltage (Nominal)	220 – 230							Vac
@60Hz	Maximum AC Power in Backup Operation	12,500 ⁽⁵⁾							W
	AC Frequency	60 ± 5							Hz
	Maximum Continuous Output Current in Backup Operation	52							A
	Fault Current Protection (100ms)	74							A
	AC Output Voltage (Nominal)	240							Vac
AC Output Voltage (Range)	184 – 264.5							Vac	
INPUT – DC (PV AND BATTERY)									
Transformer-less, Ungrounded	Yes								
Maximum Input Voltage	480								Vdc
Nominal DC Input Voltage	380								Vdc
Ground-Fault Isolation Detection	600kΩ Sensitivity per Unit								
Maximum DC PV Power	4400	6000	7360	8000	10,000	12,000	16,000	20,000	W
Maximum Input Current	6.5	9.0	10.5	11.5	13.5	16.5	20.5	25.5	Adc
Isc PV	6.5	9.0	10.5	11.5	13.5	16.5	20.5	25.5	Adc
Maximum Inverter Efficiency	99.2								%
European Weighted Efficiency	98.3	98.8			99				%
Reverse-Polarity Protection	Yes								

(1) Adjustable to all lower models using SolarEdge Go.

(2) Only available in Poland, France, and Hungary. For details about the inverters approved for installation in your country, see [here](#).

(3) 4600 VA AC / 7130 VA DC in Germany.

(4) The default AC power in backup operation for each model is equal to its rated AC power in on-grid mode. The AC power in backup operation is selectable within the range 2,500W to 10,000W for all models. Please ensure that the protective device and CSA of the cables are correct for the selected power in backup mode.

/ SolarEdge Home Hub Inverter

Single Phase, for Europe / India / Philippines

SE2200H / SE3000H / SE3680H / SE4000H / SE5000H / SE6000H /
SE8000H / SE10000H

Applicable to inverters with part number	SE10000H-RWSKBF57 ⁽¹⁾							Units
	SE2200H ⁽²⁾	SE3000H	SE3680H	SE4000H	SE5000H	SE6000H	SE8000H	
BATTERY STORAGE								
Supported Battery Models	SolarEdge Home Battery 400V							
Number of Batteries per Inverter	Up to 3							
Continuous Power	5000W per battery, total continuous discharge power is limited up to the inverter rated AC power for on-grid and backup applications							W
SMART ENERGY CAPABILITIES								
Backup and Battery Storage	With Backup Interface (purchased separately) for service up to 100A; up to 3 SolarEdge single phase inverters							
ADDITIONAL FEATURES								
Supported Communication Interfaces	RS485; Ethernet; Wi-Fi (optional); LTE (optional); SolarEdge Home Network							
Integrated AC, DC and Communication Connection Unit	Built-in							
Inverter Commissioning	Inverter Commissioning with the SetApp mobile application using built-in Wi-Fi Access Point for local connection							
Arc Fault Protection	Integrated, user configurable (according to UL 1699B:2018)					Integrated, user configurable (according to UL 1699B:2011)		
STANDARD COMPLIANCE								
Safety	IEC 62109; IS 16221-2							
Grid Connection Standards	VDE-AR-N 4105; Tor Erzeuger Typ A; EN 50549-1; CEI 0-21, G98 Type A; G98 NI Type A; RD 1699 / RD 413 / NTS; VDE-V 0126-1-1; VFR 2019; C10/11; G100; IS 16169; IEC 61683; IEC 62116; IEC 61727							
Electromagnetic Compatibility (EMC)	IEC 61000-6-2; IEC 61000-6-3; EN/IEC 61000-3-2; EN/IEC 61000-3-3; IEC 61000-3-11; IEC 61000-3-12; EN 55011							
INSTALLATION SPECIFICATIONS								
Warranty	12(standard) / 25(optional) years, with an 8-year warranty applicable to systems installed in India ⁽⁶⁾							
AC Output – Supported Cable Diameter	9 – 16							mm
AC – Supported Wire Cross Section	1 – 16							mm ²
Dimensions with Connection Unit (H x W x D)	535 x 370 x 185							mm
DC Input	3 x MC4 pairs for PV input; 1 x MC4 pair for battery input							
Weight	19.6							kg
Cooling	Natural convection							
Noise	< 25							dBA
Operating Temperature Range	-40 to +60							°C
Protection Rating	IP65 – outdoor and indoor							

(5) Operational only at ambient temperatures up to 30°C. Above 30°C, the Maximum Rated AC Power in Backup Operation is 11,400W.

(6) For specific warranty details of the SolarEdge Home Hub Single Phase Inverter in India, refer to the [SolarEdge Limited Product Warranty \(India\)](#).

SolarEdge is a global leader in smart energy technology. By leveraging world-class engineering capabilities and with a relentless focus on innovation, SolarEdge creates smart energy solutions that power our lives and drive future progress.

SolarEdge developed an intelligent inverter solution that changed the way power is harvested and managed in photovoltaic (PV) systems. The SolarEdge DC optimized inverter maximizes power generation while lowering the cost of energy produced by the PV system.

Continuing to advance smart energy, SolarEdge addresses a broad range of energy market segments through its PV, storage, EV charging, UPS, and grid services solutions.

-  SolarEdge
-  @SolarEdgePV
-  @SolarEdgePV
-  SolarEdgePV
-  SolarEdge
-  www.solaredge.com/corporate/contact

solaredge.com

© SolarEdge Technologies, Ltd. All rights reserved. SOLAREEDGE, the SolarEdge logo, OPTIMIZED BY SOLAREEDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are trademarks of their respective owners. Date: November 2, 2025 DS-000279-IM Subject to change without notice.

Cautionary Note Regarding Market Data and Industry Forecasts: This brochure may contain market data and industry forecasts from certain third-party sources. This information is based on industry surveys and the preparer's expertise in the industry and there can be no assurance that any such market data is accurate or that any such industry forecasts will be achieved. Although we have not independently verified the accuracy of such market data and industry forecasts, we believe that the market data is reliable and that the industry forecasts are reasonable.

