







AXIbiplus BC GR WB

480 - 495 Wp

High-performance bifacial solar module
108 half-cell, glass-glass, N-type back-contact

The advantages:

-  30 years Manufacturer's warranty and Performance guarantee
-  Up to 30 % more power output by Bifacial-Technology
-  Highest efficiency up to 24.25 %
-  Positive power sorting from 0-5 Wp
-  100 % visual electroluminescence inspection in production
-  Increased performance through innovative N-Type back-end contacting (ABC)


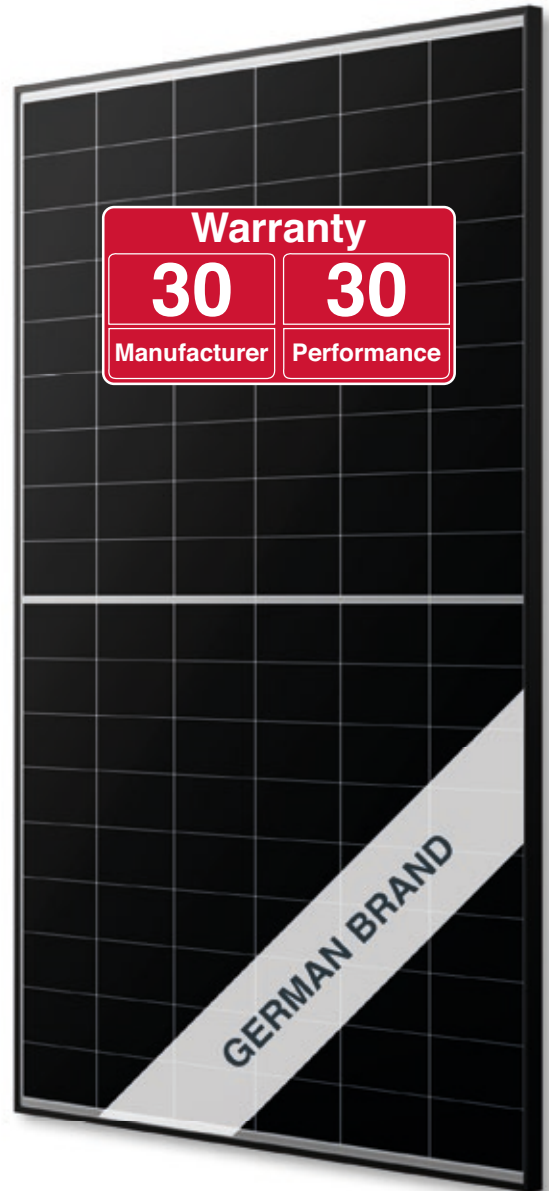


Fig. similar 108BGBEN260512A-16871

Exclusive linear AXITEC high performance guarantee!

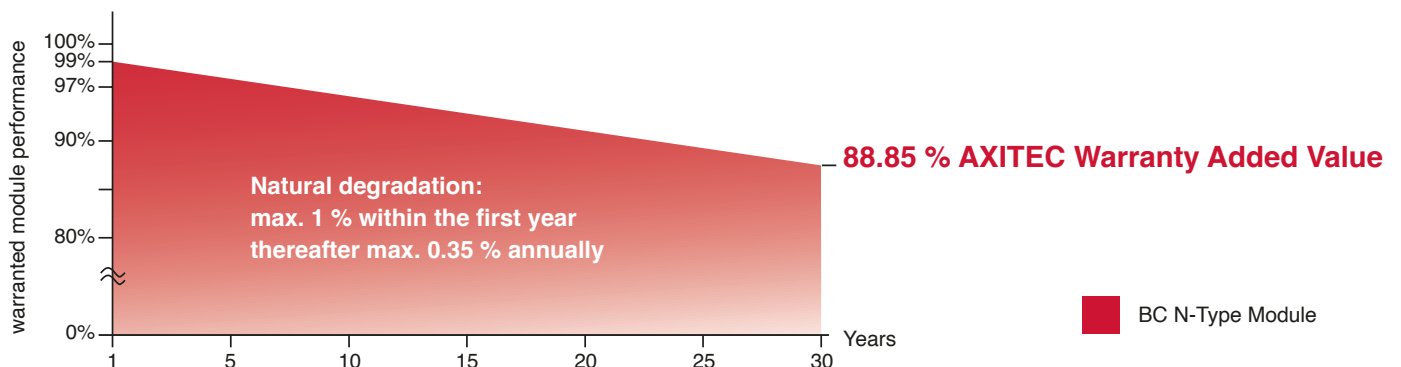

AXIbiplus BC GR WB 480 - 495 Wp

Electrical data

at standard conditions (STC): irradiance 1000 W/m², spectrum AM 1.5 at a cell temperature of 25°C

Type	AC-480BGB/108WB	AC-485BGB/108WB	AC-490BGB/108WB	AC-495BGB/108WB
Nominal output	480 Wp	485 Wp	490 Wp	495 Wp
Nominal voltage U _{mpp}	33.84 V	33.94 V	34.04 V	34.14 V
Nominal current I _{mpp}	14.19 A	14.30 A	14.40 A	14.50 A
Short circuit current I _{sc}	14.96 A	15.03 A	15.10 A	15.17 A
Open circuit voltag U _{oc}	40.76 V	40.89 V	41.02 V	41.15 V
Module conversion efficiency	23.52 %	23.76 %	24.01 %	24.25 %

at BNPI test conditions: irradiance frontside 1000 W/m², backside 135 W/m², with spectrum AM 1.5 at a cell temperature of 25°C

Nominal output P _{mpp}	520 Wp	525 Wp	530 Wp	535 Wp
Short circuit current I _{sc}	16.16 A	16.26 A	16.36 A	16.46 A
Open circuit voltag U _{oc}	40.73 V	40.83 V	40.93 V	41.03 V

Bifacial coefficients: φ_{Uoc} 1,00±5%; φ_{Isc} 0,70±5%; φ_{Pmpp} 0,70±5%

Design

Frontside	2,0 mm semi tempered AR Solarglas
Backside	2,0 mm glass, cell spaces white
Cells	108 N-Type bifacial BC high efficiency cells
Frame	30 mm black aluminium frame

Mechanical data

L x W x H	1800 x 1134 x 30 mm
Weight	24.8 kg with frame

Mechanical load

Design load (pressure/suction) 3600 Pa / 1600 Pa *

Test load (pressure/suction) 5400 Pa / 2400 Pa *

* depending on the type of installation according to the installation instructions

Power connection

Socket	Protection Class IP68, 3 bypass diodes
Wire	approx. 1.2 m, 4 mm ²
Plug-in system	IP68, MC4-EVO 2A

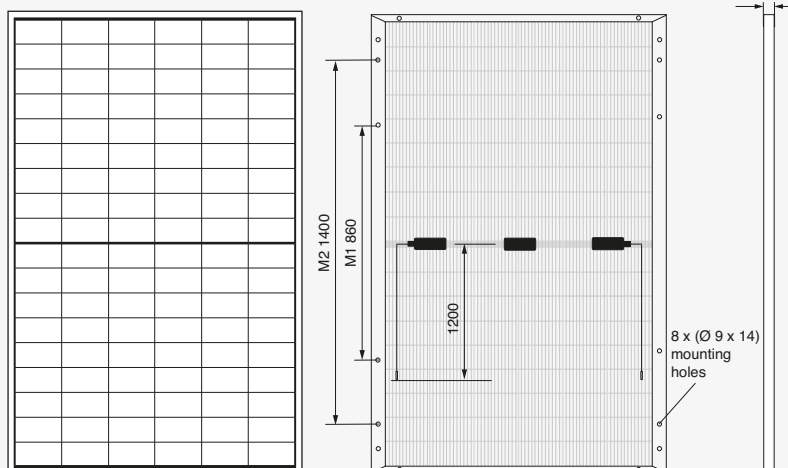


Fig. principle sketch

All dimensions in mm

Limit values

System voltage	1500 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Reverse current feed IR	25.0 A

Permissible operating temperature	-40°C to 85°C / -40F to 185F
Fire class / Protection class	C (UL790) / II

(No external voltages greater than U_{oc} may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1.5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients

Voltage U _{oc}	-0.22 %/K
Current I _{sc}	0.05 %/K
Output P _{mpp}	-0.26 %/K

Low-light performance (Example for AC-495BGB/108WB)

I-U characteristic curve	Current I _{pp}	Voltage U _{pp}
200 W/m ²	2.96 A	32.86 V
400 W/m ²	5.98 A	33.24 V
600 W/m ²	8.93 A	33.49 V
800 W/m ²	11.81 A	33.78 V
1000 W/m ²	14.50 A	34.14 V

Packaging

Module pieces per pallet	37
Module pieces per HC-container	888

