


## Ground Screw

### - Assembly -



### - Component -

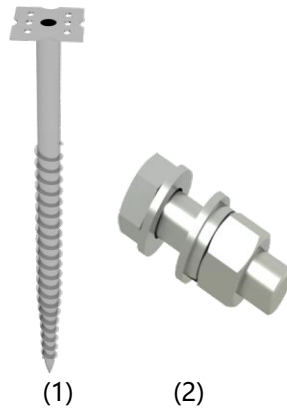

(1)

(2)

(1) PV-ezRack Ground Screw  $\varnothing 76 \times 3.5$ , with Quadrate flange and Continuous Small blade

**Part No.: GS-76/3.5/13-F0 (/GS-76/3.5/16-F0)**

(2) Hexagonal Bolt M16\*50, with nut and washer

**Part No.: ER-HB-ST16/50A**

### - Technical Specification -

<b>Application</b>	Compatible with Clenergy SolarTerrace III-A
<b>Requirement</b>	Suitable for sand and clay soil
<b>Pipe Length</b>	1300mm / 1600mm
<b>Thickness</b>	Pipe thickness is 3.5mm; Quadrate flange thickness is 6mm;
<b>Weight</b>	GS-76/3.5/13-F0: 10.351kg; GS-76/3.5/16-F0: 12.126kg; ER-HB-ST16/50A: 0.166kg;
<b>Packaging</b>	Ground Screw: 56 PCS per pallet; Fasteners: 150 units per carton;
<b>Minimum of Quantity</b>	4 pallets (224 PCS) per length
<b>Material</b>	Main Structure: Hot-dip Galvanized Steel (Q235B) at 85 microns in average; Fasteners: SUS 304;
<b>Color</b>	Silver
<b>Standard</b>	AS NZS1170.2-2011

