


PV-ezRack SolarRoof, Tin Interface with ezClick connection for ECO-Rail

- Component

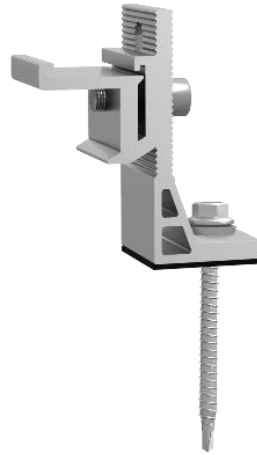

Tin Interface A with ezClick connection for ECO-Rail

Part Number: ER-I-05A/EZC/ECO

- Technical Specification

Application	Trapezoidal or Corrugated Tin Roof
Purlin requirement	Metal or Timber purlin
Screw specification	Buildex 14-11 x 70 (14 gauge, 6.3 mm, 11 TPI, 70 mm long) Hex Head Zips Screw
EPDM	Pre-fitted (2mm thickness)
Dimensions	L40mm*W38mm*H84mm
Packaging	40 units per pack;4 packs(160 units) per carton
Weight	152 g
Material	Main Structure: AL6005-T5 Bolts/washers/nuts: SUS 304
Color	Silver (anodized, no less than 10 µm)
Standard	AS NZS1170.2-2011

