

Harvest the Sunshine


640W



JA SOLAR

JAM66D45 LB n-type Double Glass Bifacial Modules

Premium Cells



MBB Half-Cell
Technology

26%
Up To

Cell Conversion
Efficiency

Premium Modules



Higher power
generation better LCOE




n-type with very
Lower LID



Better Temperature
Coefficient



Better low irradiance
response

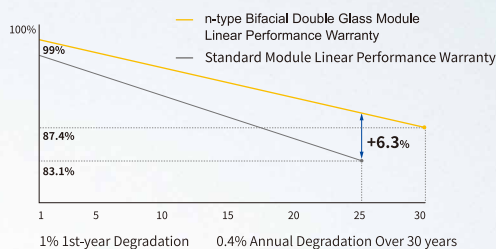


12-year product
warranty



30-year linear power
output warranty


Comprehensive Certificates

- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing

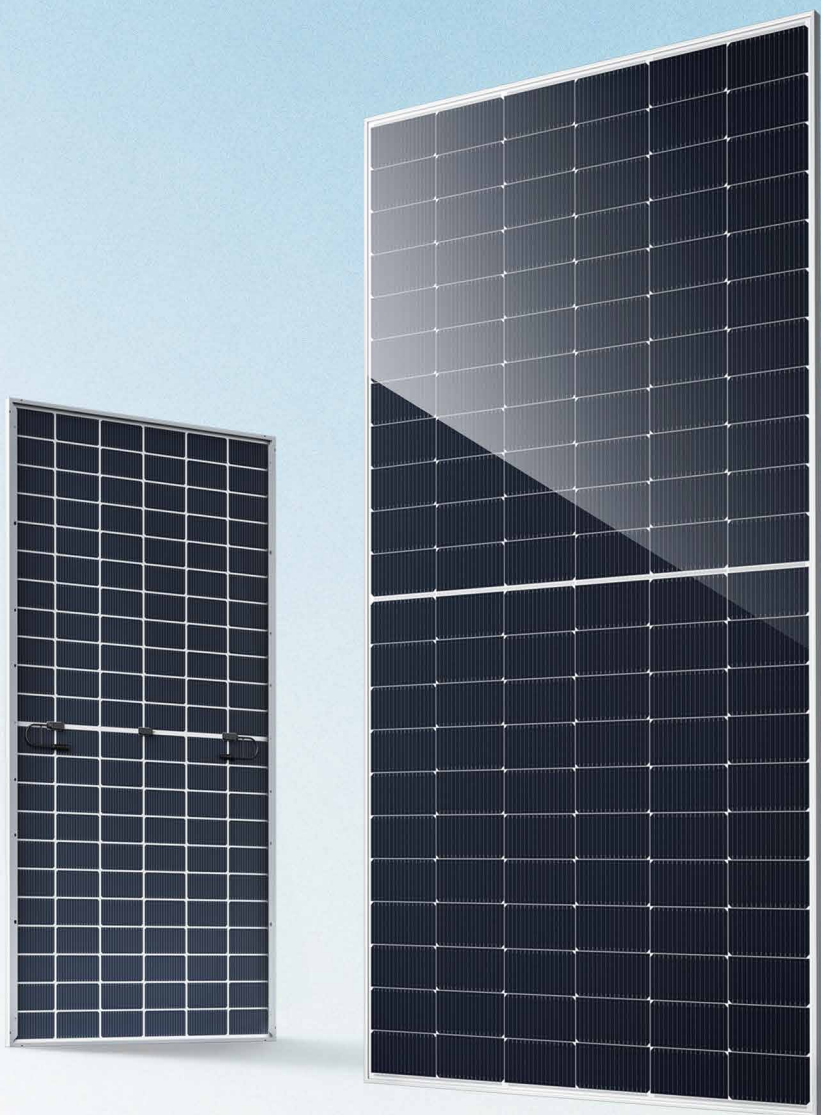

DEEP BLUE 4.0 Pro

JAM66D45 LB n-type Double Glass Bifacia Modules

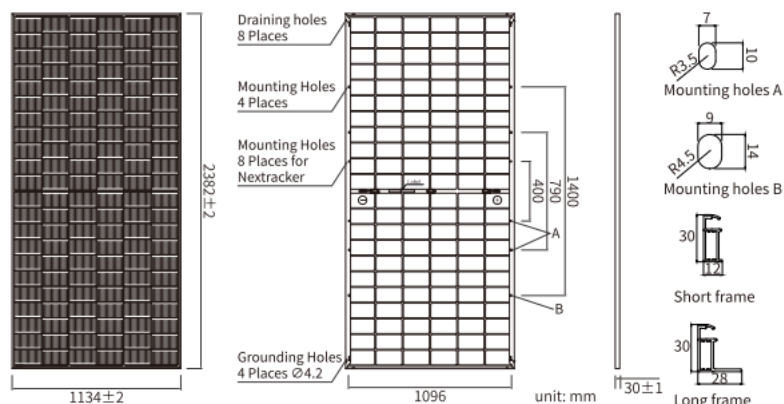

MECHANICAL PARAMETERS

Cell	Mono
Weight	33.1kg
Dimensions	2382±2mm×1134±2mm×30±1mm
Cable Cross Section Size	4mm ² (IEC), 12 AWG(UL)
No. of cells	132(6×22)
Junction Box	IP68, 3diodes
Connector	QC 4.10-351/ MC4-EVO2A
Cable Length (Including Connector)	Portrait: 400mm(+)/200mm(-) Landscape: 1600mm(+)/1600mm(-)
Front Glass/Back Glass	2.0mm/2.0mm
Packaging Configuration	36pcs/Pallet, 648pcs/40HQ Container

Remark: customized frame color and cable length available upon request

ELECTRICAL PARAMETERS AT STC

TYPE	JAM66D45 -615/LB	JAM66D45 -620/LB	JAM66D45 -625/LB	JAM66D45 -630/LB	JAM66D45 -635/LB	JAM66D45 -640/LB
Rated Maximum Power(P _{max}) [W]	615	620	625	630	635	640
Open Circuit Voltage (V _{oc}) [V]	48.30	48.50	48.70	48.90	49.10	49.39
Maximum Power Voltage(V _{mp}) [V]	39.96	40.21	40.45	40.70	40.94	41.20
Short Circuit Current(I _{sc}) [A]	16.10	16.13	16.15	16.18	16.21	16.24
Maximum Power Current(I _{mp}) [A]	15.39	15.42	15.45	15.48	15.51	15.54
Module Efficiency [%]	22.8	23.0	23.1	23.3	23.5	23.7
Power Tolerance	0~+3%					
Temperature Coefficient of I _{sc} (α _{Isc})	+0.045%/°C					
Temperature Coefficient of V _{oc} (β _{Voc})	-0.250%/°C					
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.290%/°C					
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G					


Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

TYPE	JAM66D45 -615/LB	JAM66D45 -620/LB	JAM66D45 -625/LB	JAM66D45 -630/LB	JAM66D45 -635/LB	JAM66D45 -640/LB
Rated Max Power(P _{max}) [W]	664	670	675	680	686	691
Open Circuit Voltage(V _{oc}) [V]	48.30	48.50	48.70	48.90	49.10	49.39
Max Power Voltage(V _{mp}) [V]	39.96	40.21	40.45	40.70	40.94	41.20
Short Circuit Current(I _{sc}) [A]	17.39	17.42	17.44	17.47	17.51	17.54
Max Power Current(I _{mp}) [A]	16.62	16.65	16.69	16.72	16.75	16.78
Irradiation Ratio (rear/front)	10%					

* For NexTracker installations, maximum static load please take compatibility approve letter between JA Solar and NexTracker for reference.

CHARACTERISTICS

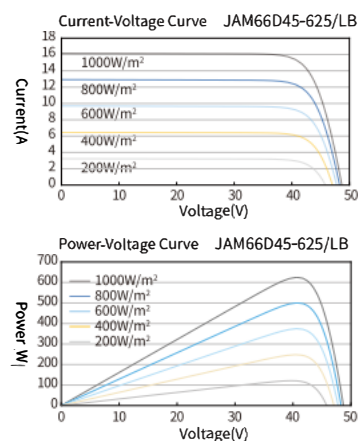

OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	35A
Maximum Static Load, Front*	5400Pa(112 lb/ft ²)
Maximum Static Load, Back*	2400Pa(50 lb/ft ²)
NOCT	45±2 C
Bifaciality	80%±5%
Safety Class	Class II
Fire Performance	UL Type 29/Class C



Headquarters

No. 8 Building, Nuode Center, No.1 Courtyard, East Auto Museum Road,
Fengtai District, Beijing
Tel: +86 10 6361 1888 Fax: +86 10 6361 9999
E-mail: sales@jasolar.com marketing@jasolar.com www.jasolar.com

Specifications subject to technical changes and tests.
JA Solar reserves the right of final interpretation.

Version No. : Global-EN-20250707C