


- 1) Insert the lower part of the clamp diagonally.
- 2) Turn until it touches the edge of the slot and press.
- 3) Align the clamp by matching the projections in the slot.
- 4) Tighten the screw to lock the module.

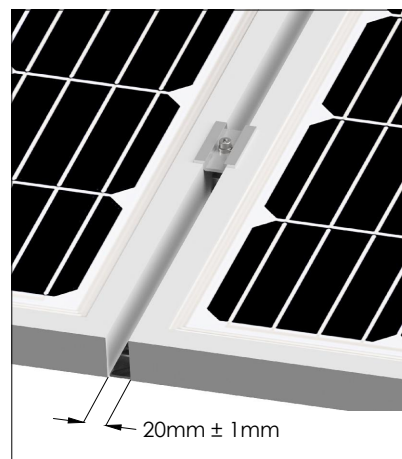

Valid for module thickness from 28 mm to 40 mm.

### Specifications

Description	Central clamp to fix panels to each other
Length	60 mm
Module thickness	28-40 mm
Compatible profile	G3-EN
Features	Screws: A2-70 stainless steel Trim: Aluminium EN AW 6005A T6 (Raw or anodised)
Tightening torque	Screw M6: 7 Nm

Tools required:



Safety:



Marking  
ES19/86524 CE