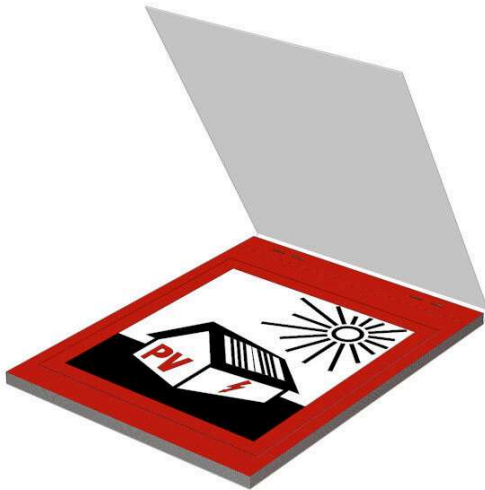


**TABPACK PV 90/100 WFF****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

UV-radiation causes high stress and aging of plastic in the outdoor application.

Our new THM PV labels resist these influences and are extremely durable in outdoor use.

Compact designed packaging are our PACK-PV. These are-printed warning labels, which should be a part of the basic equipment of a professional photovoltaic builder.

Your advantage:

- Weathering resistance tested according to ISO DIN EN ISO 4892-2:2013 table 3, procedure A cycle 1 at 5000 hours

**General ordering data**

|            |                                                       |
|------------|-------------------------------------------------------|
| Version    | Device markers, Device markers, 100 x 90 mm, coloured |
| Order No.  | <a href="#">2817460000</a>                            |
| Type       | TABPACK PV 90/100 WFF                                 |
| GTIN (EAN) | 4064675322771                                         |
| Qty.       | 20 items                                              |

## TABPACK PV 90/100 WFF

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Dimensions and weights

|            |        |                 |             |
|------------|--------|-----------------|-------------|
| Depth      | 0.1 mm | Depth (inches)  | 0.0039 inch |
| Height     | 100 mm | Height (inches) | 3.937 inch  |
| Width      | 90 mm  | Width (inches)  | 3.5433 inch |
| Net weight | 3.21 g |                 |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## General data

|                                   |                       |                                   |               |
|-----------------------------------|-----------------------|-----------------------------------|---------------|
| Adhesive                          | Polyacrylate adhesive | Version                           | Self-adhesive |
| Width                             | 90 mm                 | UL 94 flammability rating         | V-0           |
| Operating temperature range, max. | 110 °C                | Operating temperature range, min. | -50 °C        |
| Colour                            | coloured              | Halogen                           | Yes           |
| Basic material                    | Vinyl film            | Printed characters                | Symbols       |
| Approval acc. to UL 969           | Yes                   |                                   |               |

## Device markers

|         |     |
|---------|-----|
| Halogen | Yes |
|---------|-----|

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 8.0    | EC001288    | ETIM 9.0    | EC001288    |
| ETIM 10.0   | EC001288    | ECLASS 14.0 | 27-28-11-04 |
| ECLASS 15.0 | 27-28-11-04 |             |             |

