



2322304903_Single Phase Bus Cable (2.5mm²,H07,2m)



CHANGE NO.	CHANGE CONTENTS	REV.	NAME/DATE
①	Update electrical parameters	0.1	LJ 2019-2-28
②	Change the English name	0.2	YFT 2019-7-26
③	Update dimensions; Update part name; Update electrical parameters	0.3	YFT 2022-6-13
④	Update electrical parameters	0.4	YFT 2022-6-30

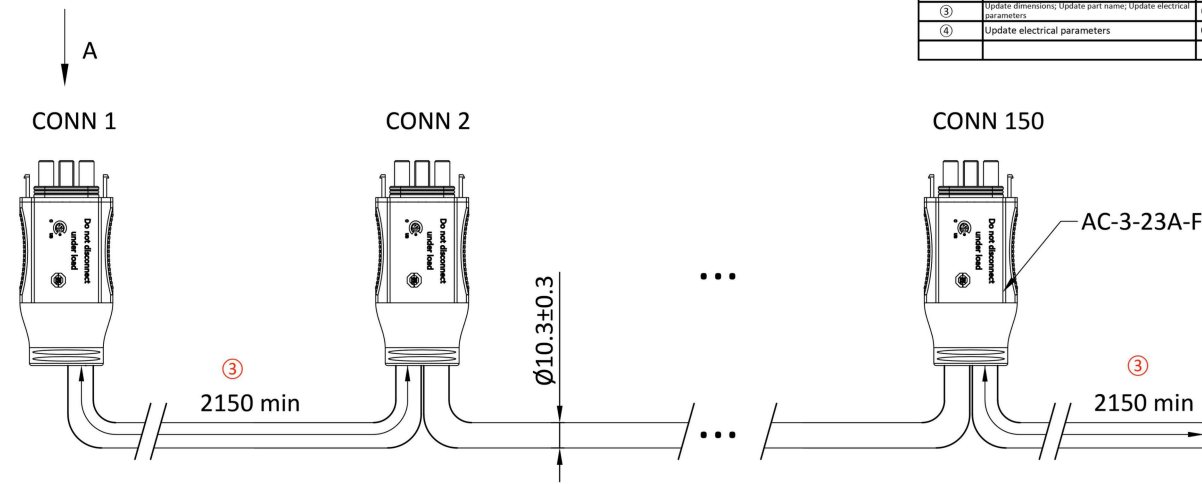

VIEW A

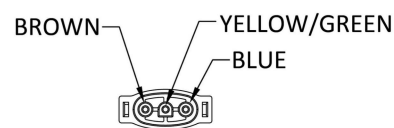

Notes:

1. Cable marking: «VDE» H07RN-F 3G2.5mm² ⓂTL SU01048-6004 SAA101170EA GP-85-PCP 0.6/1.0KV HEAVY DUTY 450/750V WUXI ZHONGHUI WIRE & CABLE CO., LTD
CCC A005618 60245 IEC66 (YCW) 3×2.5mm² 450/750V WUXI SHI ZHONGHUI XIANLAN YOUXIAN GONGSI
2. Waterproof rating: IP67
3. A series of bus cable contains 150 connectors, each connector spacing is 2150mm
4. Wiring: BROWN-L, BLUE-N, YELLOW/GREEN-PE
5. Electrical parameters:
Working voltage rating: 600V
Working current rating cable 23A
Resistance voltage: AC 2500V 50mA 1 Minute
Conductor resistance: 7.98Ω/km

① ③ ④

TOLERANCES UNLESS OTHERWISE SPECIFIED	MATERIAL	 NAME Single Phase Bus Cable (2.5mm ² ,H07,2m)
>0-100 ±5 >2500-3500 ±45 >100-500 ±10 >3500-4500 ±50 >500-900 ±15 >4500-5500 ±65 >900-1300 ±25 >5500-6500 ±80 >1300-1800 ±30 >6500-8000 ±90 >1800-2500 ±35 >8000-10000 ±100		
DWN.	UNIT mm	
CHK.	SHEET -- OF --	REV. 0.4