


2334076132\_ Single Phase Br. Ext-cable (2.5mm<sup>2</sup>,1m)



CHANGE NO.	CHANGE CONTENTS	REV.	NAME/DATE
①	Update electrical parameters	0.1	LI 2019-2-28
②	Change the part name	0.2	YFT 2019-7-26
③	Change the label to heat shrinkable tube	0.3	YFT 2020-5-22
④	Update part name; Update electrical parameters	0.4	YFT 2022-6-13
⑤	Update electrical parameters	0.5	YFT 2022-6-30

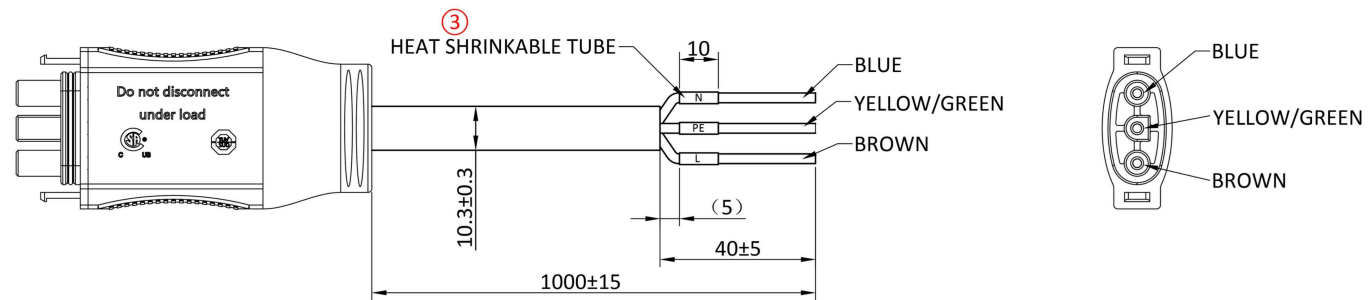

WIRE RUN LIST		
mm <sup>2</sup>	COLOR	LABEL
2.5	BROWN	L
	BLUE	N
	YELLOW/GREEN	PE

Notes:

- Cable: •VDE• H07RN-F 3G2.5mm<sup>2</sup> KTL SU01048-6004 SAA101170EA GP-85-PCP 0.6/1.0KV HEAVY DUTY 450/750V WUXI ZHONGHUI WIRE & CABLE CO., LTD CCC A005618 60245 IEC66 (YCW) 3×2.5mm<sup>2</sup> 450/750V WUXI SHI ZHONGHUI XIANLAN YOUXIAN GONGSI
- Waterproof rating: IP67;
- Wiring: BROWN-L, BLUE-N, YELLOW/GREEN-PE;
- ①④⑤ Electrical parameters:  
Working voltage rating: 600V  
Working current rating cable 23A  
Resistance voltage: AC 2500V 50mA 1 Minute  
Conductor resistance: 7.98Ω/km

TOLERANCES UNLESS OTHERWISE SPECIFIED			MATERIAL	
>0-100	±5	>2500-3500	±45	
>100-500	±10	>3500-4500	±50	
>500-900	±15	>4500-5500	±65	
>900-1300	±25	>5500-6500	±80	
>1300-1800	±30	>6500-8000	±90	
>1800-2500	±35	>8000-10000	±100	

DWN.	UNIT	mm		
CHK.	SHEET	OF	REV.	0.5

NAME	Single Phase Br. ②④ Ext-Cable(2.5mm <sup>2</sup> ,1m)
DRAWING NO.	