



2322609122_3-phase 5C Bus Cable (4mm²,H07,2.4m)



CHANGE NO.	CHANGE CONTENTS	REV.	NAME/DATE

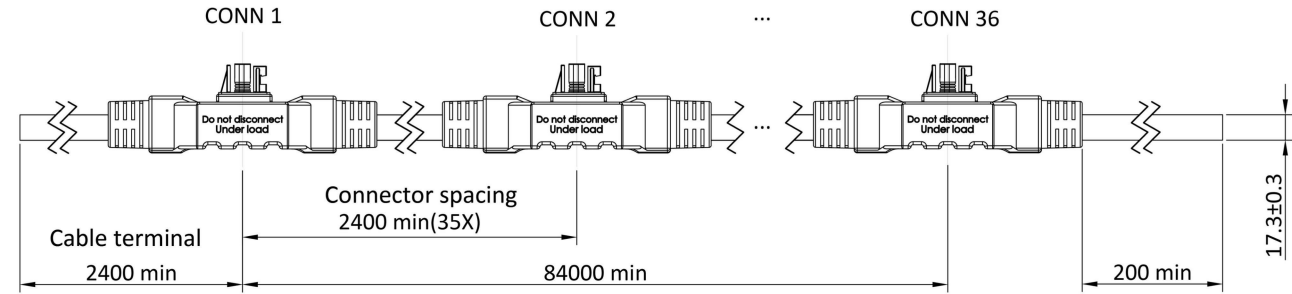


Connector pin view
2:1



PE N L3 L2 L1
YELLOW/GREEN BLUE GRAY BLACK BROWN

Connector back view



- Notes:
- Electric testing:
- Cable: 5C×4mm² H07RN-F, UV resistance.
Cable marking: 60245IEC66(YCW) 450/750V 5×4MM2 <VDE> H07RN-F 5G4MM2
SUMTUNG CABLE TECHNOLOGY CO.,LTD. -LF-
 - Dielectric withstand voltage test: DC 4000V, leakage current 5mA, duration 60s;
 - Working voltage rating: 600V;
 - Working current rating: 30A;
 - Contact resistance: ≤20mΩ;
 - Insulation resistance: ≥500MΩ;
 - Wiring: BROWN--L1, BLACK--L2, GRAY--L3, BLUE--N, YELLOW/GREEN--PE;
- Mechanical property:
- Insert and draw frequency: ≥50 times;
- Environmental performance:
- Waterproof rating: IP67;
 - Environmental requirements: comply with rohs requirements;
- Others:
- A series of bus cable contains 36T, each connector spacing is 2400mm;
 - The 200N-60S tension at the t connector does not affect electrical and waterproof performance;
 - The surface has no abrasion, scratches, deformation and other defects.

TOLERANCES UNLESS OTHERWISE SPECIFIED		MATERIAL	
X.	±3.00	X°	±3.00°
.X	±2.00	.X°	±2.00°
.XX	±1.00	.XX°	±1.00°
.XXX	±0.50	.XXX°	±0.50°
DWN.	UNIT	mm	
CHK.	SHEET	OF	REV. 0.0

NAME 3-phase 5C Bus Cable (4mm ² ,H07,2.4m)
DRAWING NO.