


# INFINITY RT

**N-type**  
Mono-Facial Module

**DMxxxM10RT-54HSW-LV**  
**445~465W**

**23.3%**  
Max. Efficiency

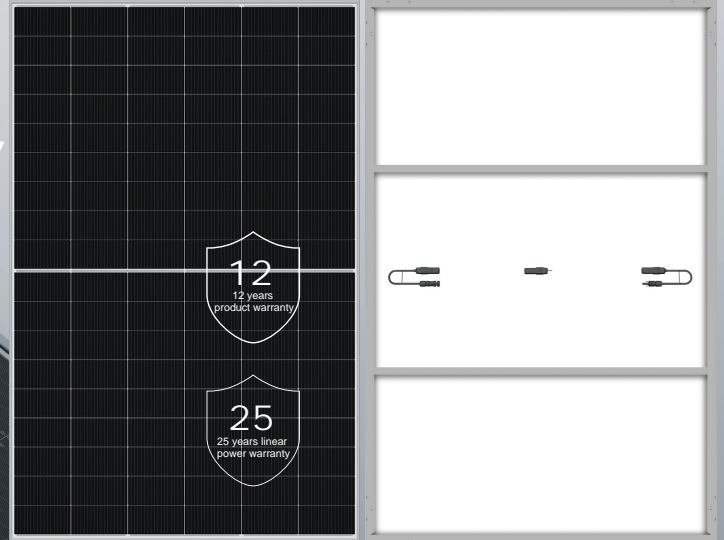

- **Leading manufacturing**  
40+ years experience in high-tech manufacturing.
- **High environmental, social and governance responsibility (ESG)**  
100% green production, transparent supply chain and excellent ESG rating in the solar industry.



**Light-Weight**  
39% lighter than equivalent double glass module,  
reduce roof loading.




**High Reliability**  
Excellent resistance to harsh environmental conditions  
such as salt, ammonia, sand, and hail.



**Green Product**  
Focus on circular economy - low carbon footprint,  
PFAS-free and recyclable components.

## POWER WARRANTY

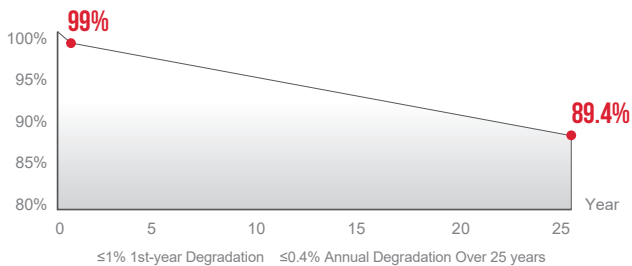

## COMPANY MANAGEMENT SYSTEM

- SA 8000: ILO Standards. Social responsibility standards
- ISO 9001: Quality management system
- ISO 14001: Environmental management system
- ISO 45001: Occupational health and safety management system
- ISO 50001: Energy management system
- ISO 27001: Information security management system

## PRODUCT CERTIFICATION

- IEC 61215, IEC 61730
- Ammonia Corrosion (IEC 62716)
- Salt Mist Corrosion (IEC 61701)
- LeTID (IEC TS 63342)
- Dust & Sand (IEC 60068)



SolarPower  
Europe




Warranty partner



# DMxxxM10RT-54HSW-LV

## Module Specification

Cell Type	N type Mono-crystalline, 108(6×18)
Dimensions (mm)	1762x1134x30
Weight (kg)	15.0±3%
Front Cover	1.6 mm heat strengthened glass
Rear Cover	Backsheet
Junction Box	3 Diodes, IP68 according to IEC 62790
Output Cables (Including Connector)	4mm <sup>2</sup> /Portrait: 300mm(+)/200mm(-) Landscape: 1100mm(+)/1100mm(-) Length can be customized
Connector Type	PV-ZH202B or MC4-EVO 2A(1500V)

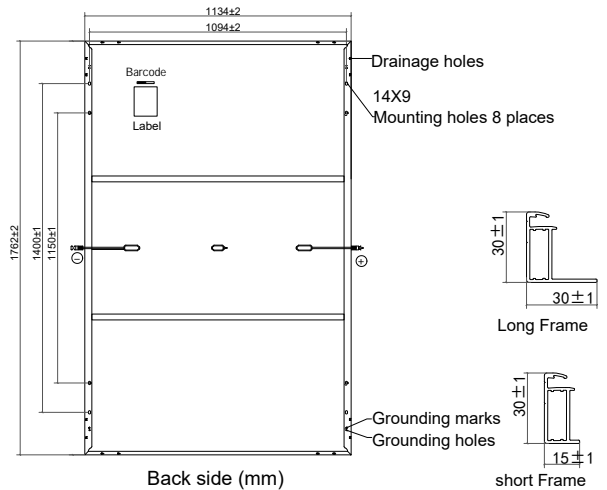

## Electrical Specifications<sup>1</sup>

Module Type	DM445M10RT-54HSW-LV <sup>4</sup>		DM450M10RT-54HSW-LV		DM455M10RT-54HSW-LV		DM460M10RT-54HSW-LV		DM465M10RT-54HSW-LV	
	STC <sup>2</sup>	NMOT <sup>3</sup>	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax/W)	445	335	450	339	455	343	460	347	465	350
Maximum Power Current (Imp/A)	13.20	10.68	13.27	10.73	13.34	10.79	13.41	10.84	13.48	10.90
Maximum Power Voltage (Vmp/V)	33.71	31.49	33.91	31.68	34.11	31.86	34.31	32.05	34.51	32.24
Short-circuit Current (Isc/A)	14.10	11.36	14.17	11.41	14.24	11.47	14.31	11.53	14.38	11.58
Open-circuit Voltage (Voc/V)	40.05	37.94	40.25	38.13	40.45	38.32	40.65	38.51	40.85	38.69
Module Efficiency STC (%)	22.3		22.5		22.8		23.0		23.3	

<sup>1</sup> Measurements according to IEC 60904-3, Measurement tolerance: Isc: ±4%, Voc: ±3%, Test uncertainty for Pmax: ±3%

<sup>2</sup> STC (Standard Test Condition): Radiation 1000 W/m<sup>2</sup>, Module temperature 25 °C, AM = 1.5

<sup>3</sup> NMOT: Radiation 800 W/m<sup>2</sup>, Ambient temperature 20 °C, AM = 1.5, Wind Speed 1 m/s

<sup>4</sup> " V " represents the mono-facial module type applied to a maximum system voltage of 1500V DC

## Operating Conditions


Operating Temperature (°C)	-40 to +85
Maximum System Voltage (V)	1500 DC (IEC)
Overcurrent Protection Rating (A)	25
Power Output Tolerance (%)	0~3
Protection Class	Class II
Max. Test Load, Push/Pull (Pa)	Front 3600 / Back 2400
Max. Design Load, Push/Pull (Pa)	Front 2400 / Back 1600

## Packaging

Container	40HQ
Pallet Dimensions (mm)	1800x1140x1250
Pieces per Pallet	36
Pieces per Container	936

## Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42±2 °C
Temperature Coefficient of Pmax (%/°C)	-0.29
Temperature Coefficient of Voc (%/°C)	-0.25
Temperature Coefficient of Isc (%/°C)	+0.048

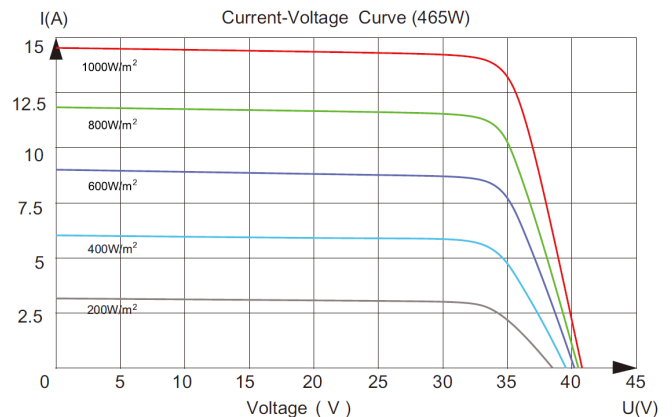

Hengdian Group DMEGC Magnetics Co., Ltd.  
 Add: Hengdian Industrial Zone, Dongyang City Zhejiang Province, China 322118  
 Tel: 0086-579-8658-8826 E-mail: solar@dmeqc.com.cn Website: www.dmeqcsolar.com

DMEGC Renewable Energy B.V.  
 Add: Industrieweg 2,2641 RM Pijnacker, Niederlande  
 Tel: +31 (0) 8 58200765 E-mail: contact@dmeqc.eu

Statement: The installation instructions and the warranty conditions must be followed. Due to technological progress, product parameters will be adjusted accordingly. When signing the contract, the latest data of the company shall prevail. All information in this data sheet corresponds to EN 50380. Changes and errors excepted. Document: EN DS-M10RT-54HSW-LV(Reinforced with Beams)-20251021.

©DMEGC 2025 – All Rights Reserved