

N-type i-TOPCon Ultra

DUAL GLASS MONOCRYSTALLINE MODULE

TSM-NEG9RP.28Z 465-485W

485_W / MAXIMUM
POWER OUTPUT

24.3% / MAXIMUM
EFFICIENCY



Exceptional power & efficiency

- Up to 485 W output and 24.3% efficiency, powered by advanced N type i-TOPCon Ultra cell technology



Maximised system value for C&I systems

- Low-voltage, high-current architecture for maximum string lengths, simplifying system design and reducing BOS costs



Long-term value with flexible deployment


- Low annual degradation backed by up to 30 year power warranty and 25 year product warranty
- Mechanical performance up to 5400 Pa positive load and 4000 Pa negative load



Improved appearance & seamless frontside design

- No cell gaps for improved aesthetics, for diverse installations and flexible system deployment for both C&I and residential applications

Performance Warranty

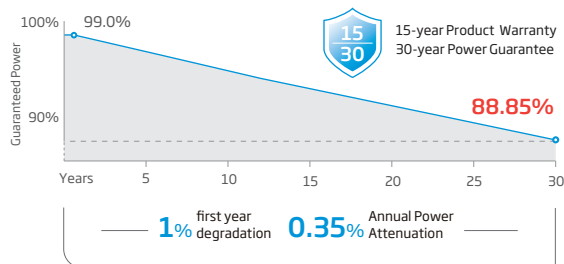

* Please refer to product warranty for details

Comprehensive Products and System Certificates

- ISO 9001: Quality Management System
- ISO 14001: Environmental Management System
- ISO14064: Greenhouse Gases Emissions Verification
- ISO45001: Occupational Health and Safety Management System



ELECTRICAL DATA (STC)

Peak Power Watts- $P_{MAX}(W_p)^*$	465	470	475	480	485
Power Selection (W)**	0 ~ +5				
Maximum Power Voltage- V_{MPP} (V)	31.20	31.50	31.80	32.00	32.30
Maximum Power Current- I_{MPP} (A)	14.91	14.93	14.96	15.00	15.04
Open Circuit Voltage- V_{oc} (V)	37.10	37.30	37.50	37.70	37.90
Short Circuit Current- I_{sc} (A)	15.96	15.99	16.02	16.05	16.08
Module Efficiency η_m (%)	23.3	23.5	23.8	24.0	24.3

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%. **Power selection up to: +3%.

ELECTRICAL DATA (NOCT)

Peak Power Watts- $P_{MAX}(W_p)$	353	357	361	364	368
Maximum Power Voltage- V_{MPP} (V)	29.20	29.40	29.60	29.80	30.00
Maximum Power Current- I_{MPP} (A)	12.11	12.16	12.20	12.23	12.27
Open Circuit Voltage- V_{oc} (V)	35.20	35.40	35.60	35.80	36.00
Short Circuit Current- I_{sc} (A)	12.83	12.85	12.88	12.90	12.93

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature) 43°C (±2°C)

Temperature Coefficient of P_{MAX} -0.26% /°C

Temperature Coefficient of V_{oc} -0.24% /°C

Temperature Coefficient of I_{sc} 0.04% /°C

Due to different testing methods, the actual performances might differ from the declared specifications.

APPLICATION CONDITIONS

Operating Temperature -40~+70°C

Maximum System Voltage 1500V DC (IEC)


Max Series Fuse Rating 30A

*PV module 98th percentile operating temperature: 70°C.


CURVES OF PV MODULE

Preliminary

I-V CURVES OF PV MODULE (475W)

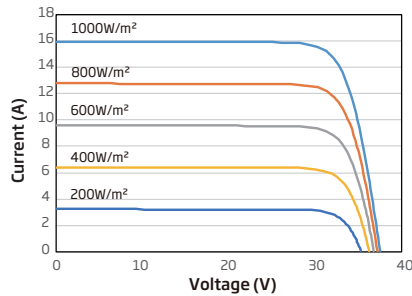


P-V CURVES OF PV MODULE (475W)

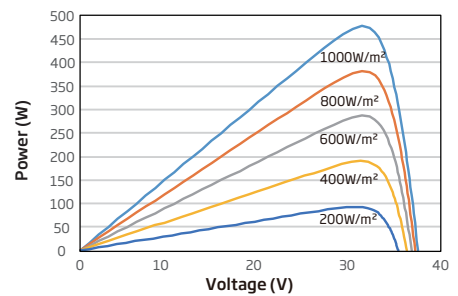

MECHANICAL DATA

Solar Cells	N-type i-TOPCon Monocrystalline
No. of cells	150 cells
Module Dimensions	1762×1134×30 mm (69.37×44.65×1.18 inches)
Weight	21.1 kg (46.52lb)
Front Glass	1.6 mm (0.06 inches) AR Coating Heat Strengthened Glass
Back Glass	1.6 mm (0.06 inches), Heat Strengthened Glass
Frame	30mm (1.18 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 6.0mm ² (0.009 inches ²) Landscape :1100/1100 mm (43.31/43.31 inches) Length can be customized
Connector	TS4 Plus / TS4 / MC4 EV02*
Packaging	Modules per box: 37 pieces Modules per 40' container: 962pieces

*The connector names listed are general names; specific types are subject to the certification documents.

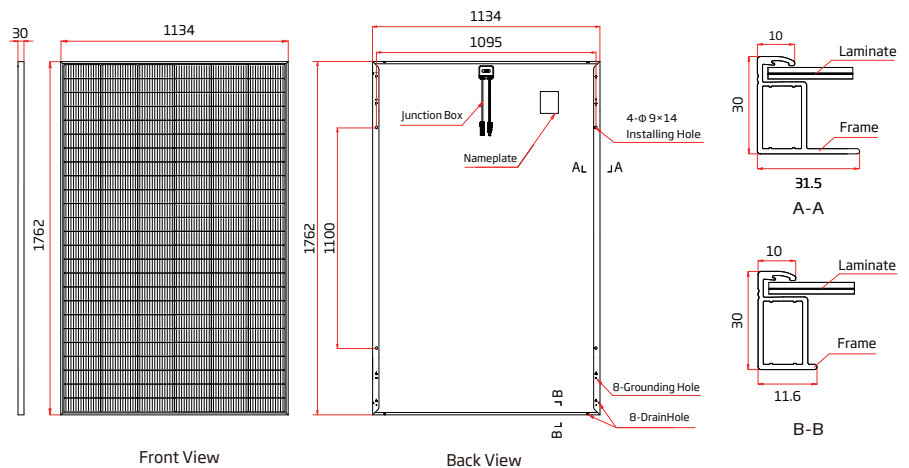

www.trinasolar.com

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
© 2026 Trina Solar Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.
The right of final interpretation belongs to Trina Solar Co., Ltd.
Version number: TSM_EN_2026_PA2