


Placement roof supports Prescription

[09-2025]


Advice distance between RoofSupport roof supports

Wire Mesh Cable Tray Width	MountBlock (RSMB102011) 	RoofBlock (RSC102011) 	RoofBlockXL (RSXL102011) 
60 mm	1.2 metre	1.2 metre	1.2 metre
100 mm	1.2 metre	1.2 metre	2 metre
150 mm	1.2 metre	1.2 metre	2 metre
200 mm	0.9 metre Alternately: left/right (see example A)	0.9 metre Alternately: left/right (see example A)	2 metre
300 mm	0.6 metre Alternately: left/right (see example A) or 2 pieces every 1.2 metres (see example B)	0.6 metre Alternately: left/right (see example A) or 2 pieces every 1.2 metres (see example B)	2 metre
400 mm	0.6 metre Alternately: left/right (see example A) or 2 pieces every 1.2 metres (see example B)	0.6 metre Alternately: left/right (see example A) or 2 pieces every 1.2 metres (see example B)	2 metre
500 mm	0.6 metre 2 pieces side by side (see example C)	0.6 metre 2 pieces side by side (see example C)	2 metre
600 mm	0.6 metre 2 pieces side by side (see example C)	0.6 metre 2 pieces side by side (see example C)	2 metres 2 pieces side by side (see example D)


Voorbeeld A:

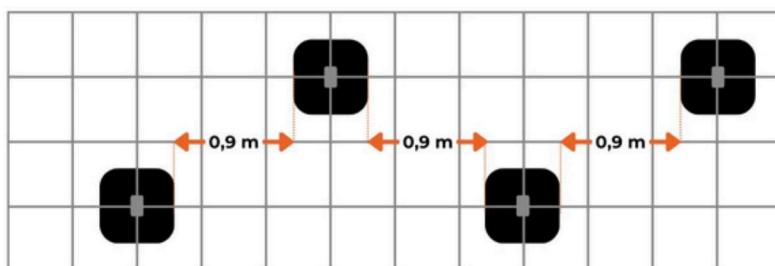


Voorbeeld B:

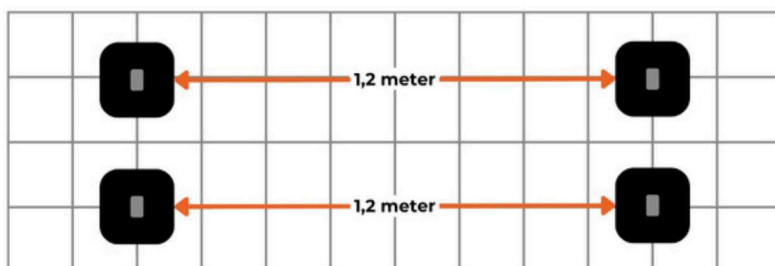

Voorbeeld C:

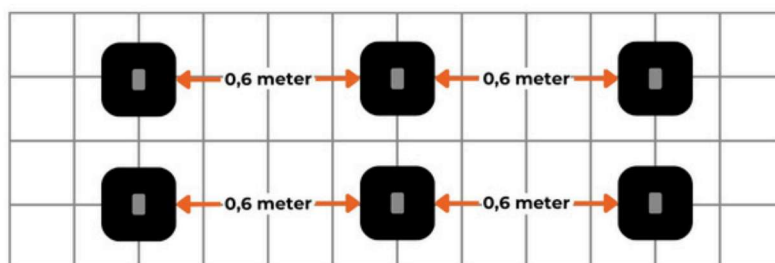

Voorbeeld D:

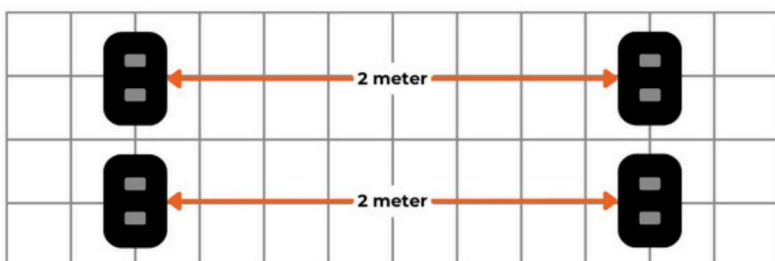

On the RS RoofBlockXL, the following wire mesh cable trays can also be placed next to each other:

- 2 pieces 65 × 60 mm wire mesh cable tray.
- 2 pieces 65 × 100 mm wire mesh cable tray.

