


- + POWERFUL N-TYPE TOPCON CELLS
- + BC: HOMOGENEOUS PURE BLACK LOOK WITHOUT VISIBLE BUSBARS FOR THE HIGHEST DESIGN STANDARDS
- + BC: MAXIMUM EFFICIENCY AND IMPROVED HOT SPOT BEHAVIOUR
- + BC: HIGHER PERFORMANCE IN PARTIAL SHADING CONDITIONS
- + DOUBLE GLASS: HIGHER MECHANICAL AND THERMAL STABILITY



linear performance guarantee<sup>1</sup>

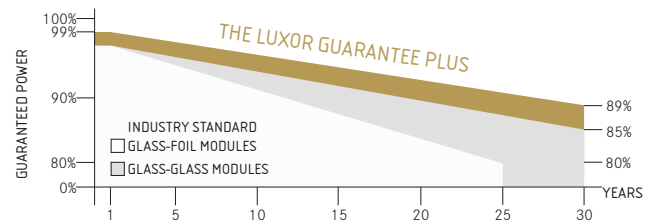

## ECO LINE PRIME 470-490W

## TOPCON PURE BLACK

GLASS-GLASS, BIFACIAL, 1800MM X 1134MM



Longlife tested



Power proofed



Safety provided




Selection of components



Back glass



Performance surplus of 0 Wp to 6.49 Wp



Higher heat dispensing



PID free  
LID Free



German warrantor

# ECO LINE PRIME 470-490W

## TOPCON, GLASS-GLASS, BIFACIAL, BB, 182R192-108+

Module type LX - XXXM/182R192-108+ GG | XXX = Rated power Pmpp

### Electrical data at STC

Rated power Pmpp [Wp]	470.00	475.00	480.00	485.00	490.00
Pmpp range to	476.49	481.49	486.49	491.49	496.49
Rated current Imp [A]	14.19	14.30	14.40	14.51	14.61
Rated voltage Vmpp [V]	33.15	33.25	33.35	33.45	33.55
Short-circuit current Isc [A]	14.78	14.90	15.00	15.11	15.22
Open-circuit voltage Uoc [V]	40.13	40.25	40.38	40.50	40.62
Efficiency at STC up to	23.34%	23.59%	23.83%	24.08%	24.32%
Efficiency at 200 W/m <sup>2</sup>	22.80%	23.05%	23.28%	23.53%	23.76%

### Electrical data at NOCT

Power at Pmpp [Wp]	355.70	359.48	363.26	367.05	370.83
Rated current Imp [A]	11.47	11.55	11.64	11.72	11.80
Rated voltage Vmpp [V]	31.01	31.12	31.21	31.32	31.43
Short-circuit current Isc [A]	11.94	12.04	12.12	12.21	12.30
Open-circuit voltage Uoc [V]	37.04	37.16	37.29	37.42	37.54

Specification as per STC (Standard test conditions): irradiance 1000 W/m<sup>2</sup> | module temperature 25°C | Air Mass = 1.5  
 NOCT (nominal operating cell temperature): irradiance 800 W/m<sup>2</sup> | wind speed 1 m/sec | ambient temperature 20°C |  
 cell operating temperature 45 +/- 2°C | Air Mass = 1.5

### Electrical data at BNPI

Rated power Pmpp [Wp]	470.00	475.00	480.00	485.00	490.00
Maximum Rated power Pmpp [Wp]	520.76	526.30	531.84	537.38	542.92
Rated current Imp [A]	15.72	15.84	15.96	16.08	16.19
Rated voltage Vmpp [V]	33.12	33.22	33.33	33.43	33.54
Short-circuit current Isc [A]	16.38	16.51	16.62	16.74	16.86
Open-circuit voltage Uoc [V]	40.17	40.29	40.42	40.54	40.66

Specifications as per BNPI (Bifacial Nameplate Irradiance): irradiance front 1000 W/m<sup>2</sup> | rear 135 W/m<sup>2</sup> | Temperature 25°C | Air Mass 1.5

### Limiting values

Max. system voltage   max. return current	1000 V or 1500 V   25 A
Safety class   Fire safety class	II   C (IEC 61730)
Operating temperature	-40 up to 85°C
Max. tested pressure/tensile load <sup>2</sup>	6000 Pa / 4000 Pa

### Temperature coefficient

Temperature coefficient [U]   [I]   [P]	-0.2 %/°C   0.05 %/°C   -0.27 %/°C
---	------------------------------------

### Specifications


Cells (matrix)   Wafer   Type	108 (6x18)   M10   N-Type TOPCon BC
Module dimensions (L x B x H) <sup>3</sup>   Weight	1800 mm x 1134 mm x 30 mm   24.5 kg
Bifaciality factor <sup>5</sup>	Up to 80%
Front side	2.0 mm semi tempered anti-reflection solar glass
Back side	2.0 mm semi tempered solar glass, black mesh
Frame	Stable anodised aluminium frame
Embedding material	POE / EVA
Junction Box   Diodes	IP68   3 Schottky Diodes
Cable	Symmetrical cable lengths > 1.2 m, 4 mm <sup>2</sup> solar cable
Connectors	MC4 or equivalent (IP67)
Hail test (max. hailstorm)	Ø 45 mm   impact velocity 30.7 m/s ± 110.5 km/h

The specifications and average values can vary slightly. Relevant is the corresponding data of the individual measurement.  
 Specifications are subject to change without notice. Tolerance depending on equipment: rated power +/- 3%, other values +/- 10%.  
 All information given in this data sheet corresponds to DIN EN 50380. A potential light-induced degradation of the power after commissioning is not considered here. Further information in the installation manuals.



- The specific warranty conditions are given under [www.luxor.solar/downloads.html](http://www.luxor.solar/downloads.html)
- Horizontal mounted (IEC61215), for details please check mounting instruction
- Tolerance L/W = +/- 3 mm, H +/- 2 mm, the dimensions given in the order confirmation will be decisive
- Location and dimensios of holes on request
- N-Type TOPCon BC Bifaciality factor 77 +/- 3 %

Your specialised Luxor partner

### Back - / Frontview <sup>3, 4</sup>

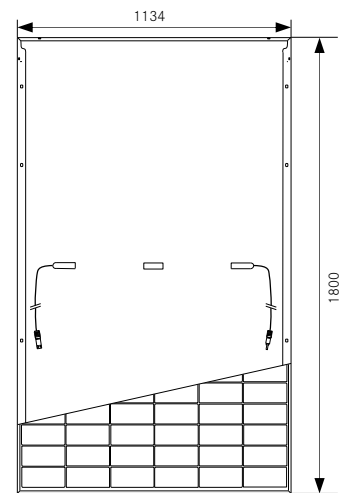

### Electrical characteristics

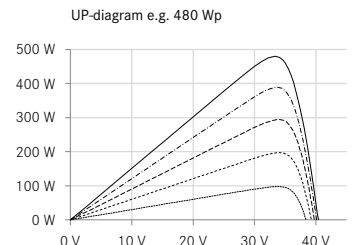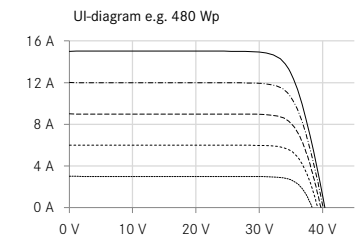

----- 200W/m<sup>2</sup>  
 ..... 400W/m<sup>2</sup>  
 - - - - - 600W/m<sup>2</sup>  
 - . - . - 800W/m<sup>2</sup>  
 \_\_\_\_\_ 1000W/m<sup>2</sup>



Guidelines:  
 93/68/EEC  
 2014/35/EU, (LVD)  
 2014/30/EU, (EMC)

The validity of the certificates/listings for a specific country has to be examined under:  
[www.luxor.solar/downloads.html](http://www.luxor.solar/downloads.html)